


CONNECTION DIAGRAM FOR STEPPER MOTOR

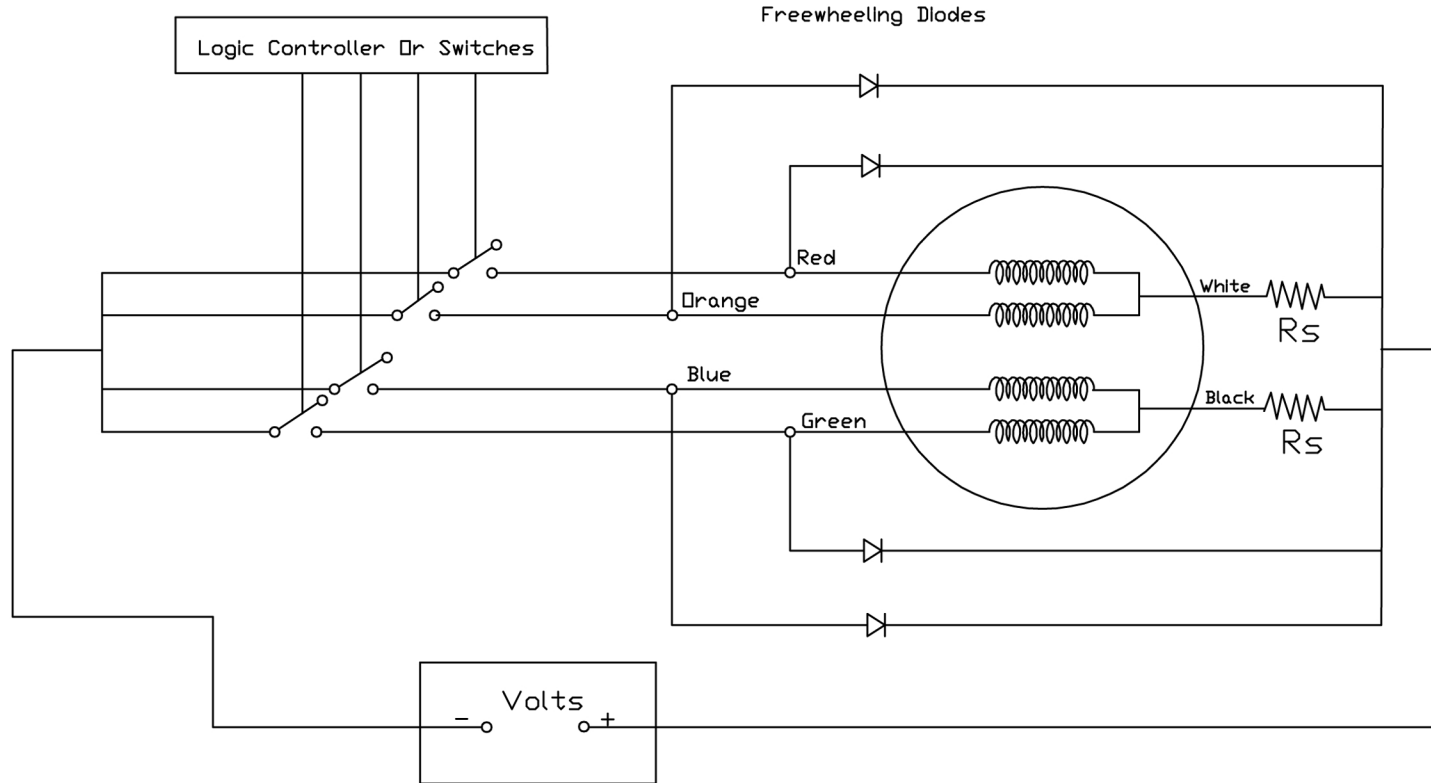

$V = 4 \times \text{Motor Voltage}$

$R_s = 3 \times R_m$ (Motor Resistance/Phase)

Suitable for Slow RPM

To Change Direction Please Read Sequence from Bottom to Top

Full Step			
Red	Orange	Blue	Green
0	1	0	1
0	1	1	0
1	0	1	0
1	0	0	1

Half Step			
Red	Orange	Blue	Green
0	1	0	1
0	0	0	1
1	0	0	1
1	0	0	0
1	0	1	0
0	0	1	0
0	1	1	0
0	1	0	0


Srijan Design

Description : Connection Details



SRIJAN CONTROL
DRIVES
PUNE, INDIA.

Scale
N.T.S



Sheet