




PPA - 7368 PHENALKAMINE EPOXY HARDENER

Phenalkamine **PPA - 7368** is a Mannich base, a reaction product of distilled cashew nutshell liquid & polyamine. It is an epoxy adduct of phenalkamine.

Chemical Structure

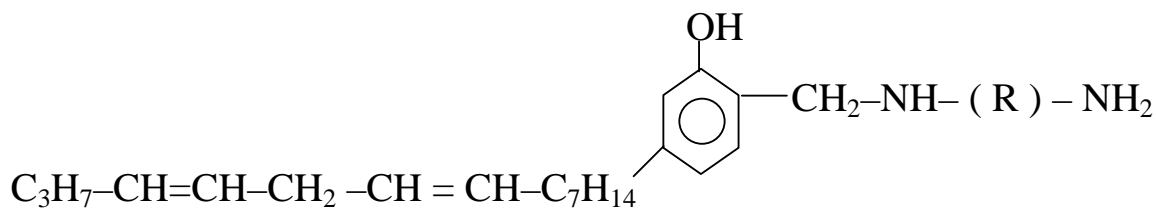

Features

- Low viscosity
- Excellent rapid cure even at low temperatures
- Good chemical, solvent & water resistance
- Very good compatibility with
 - i) Epoxy resin based on bis- phenol A
 - ii) Epoxy resin based on bis- phenol F
 - iii) Epoxy resin based on phenolic novolacs
- Non-critical mixing ratio
- Excellent curing under humid as well as damp conditions
- Good adhesion to galvanized & mechanically cleaned surfaces
- Superior corrosion resistance
- Offers good flexibility, to high DFT coatings, even at wide temperature changes
- Workable pot life at lower temperatures

Applications

- Anticorrosive primer for galvanized surfaces with high DFT
- Medium to high solid coatings
- Flooring & construction
- Marine & industrial maintenance coatings
- Tank linings
- Adhesives
- Surface tolerant primers for metallic substrates



Typical Properties

Sr. No.	Property	Unit	Specification
i)	Appearance	Visual	Orange Brown Liquid
ii)	Colour	Gardner	16 Max
iii)	Amine Value	mg KOH / g	170 - 190
vi)	N.V.M. (1 hr @105° C)	%	63 ± 1.5
v)	Viscosity @25° C	cPs	700 - 2500
vi)	Density @25° C	gm / cm ³	0.97 - 0.99
vii)	Flash Point (Closed Cup)	°C / °F	31 / 87.8
viii)	AHEW	g / eq.	190
ix)	Recommended PHR (EEW -190)	----	100

Curing Properties

Formulation

Liquid Epoxy Resin (EEW - 190)	100
PPA - 7368	100

Optimum Curing Schedule 7 days at 25° C

Gel Time (100g @ 25° C)Mixing	60 - 80 min
---------------------------------	-------------

B.K Drying Recorder, set time, (200 microns) 8 mil (Liquid Epoxy Resin EEW - 190)

@ 25° C	1 - 2 hrs
@ 5° C	8 - 10 hrs
@ 0° C	-

Storage & Stability

Hardener **PPA - 7368** should be stored in a cool dry place at 18 - 25° C in the sealed containers to achieve shelf life of minimum one year. Product can react with moisture & carbon dioxide in the air. This may result in increased viscosity & reduced activity.

Handling Precautions

May be harmful if ingested or absorbed through the skin & can cause sensitization. Will cause severe inflammation in contact with eye & skin. Wash thoroughly after handling. Adequate ventilation is essential during application. Containers should be tightly closed when not in use or during transportation. Do not inhale mist or vapours. It is recommended to use gloves, safety glasses & protective clothing for safe handling.



First AID

In case of

- Inhalation** : Remove to fresh air & give oxygen if breathing is difficult.
- Ingestion** : Give plenty of water. Do not induce vomiting. Contact a physician.
- Contact with eyes** : Flush eyes with plenty of clean water for at least 15 minutes.
- Contact with skin** : Immediately wash with mild soap & water.

Disclaimer

All information contained is based on practical experience. Our technical advice – whether verbal, written by way of trials are given in good faith. Neither warranty nor guarantee is offered or implied & accepted at the seller's risk, since the actual conditions prevailing at the time of using this product are outside the control of the company. Hence it is entirely buyer's & user's responsibility. While the information contained here in is believed to be reliable. **Paladin Paints & Chemicals Pvt. Ltd.** makes no representations as to the results the user or buyer will attain. Product performance & full scale testing are the responsibilities of the buyer & user.

Paladin Paints & Chemicals Pvt. Ltd.

Unit No-204, Monarch Chambers, Marol Maroshi Road, Marol Naka, Andheri (E), Mumbai 400 059, Maharashtra, India.

Phone : (022) 29202587 / 29206258 . **Fax** : (022) 29254386 . **Email** : vanaprabha@vsnl.com