

Magnetic, Float Operated Oil Level Gauge 'MFDG'

Simple & reliable gauge for oil level indication in tanks.

Construction & Operation :

It consists of a float with an extended arm, which moves in a span of 90° in a vertical plane from bottom to top corresponding to tank empty & full condition. The change in liquid level is picked up by the float & transmitted to the pointer, moving on calibrated dial through gear mechanism & set of magnets.

Specifications :

Enclosure	: Cast Al, IP 66
Measuring Range	: 200 - 1200 in steps of 100mm
Calibrated Dial	: Al x white pdr coated x black graduations /numericals
Ind. Markings	: E, 1/4, 1/2, 3/4 & F
Float	: SS304 or PU x Ø50 mm
Process Flange	: Cast Al x Ø190 x 165 PCD x 6 h - Ø12 mm
Min. Density	: 0.8 g/cm ³
Max. Temperature:	100°C
Max. Pressure	: 4 Kg/cm ²
Installation	: Side mounted (at center of tanks)

Alarm Switches (Optional)

Switch Type	: Micro switch, Monostable
Switch Rating	: 5A, 230VAC x SPDT
No of Contacts	: Two (High & Low)
Cable Gland	: Polyamide x PG 7

Service :

Transformer oil, Diesel, Fuel Oil

Model Identification


MFDG-	J	O	x Measuring Range
Enclosure			
Cast Al - IP66	J		
Non std.		O	
Output			
Local Indication Only		1	
Local Indication & One Switch		2	
Local Indication & Two Switches		3	

Ordering Information:


Model No. x Liquid along with its density x Optg. Temp & Pressure



Schematic diagram

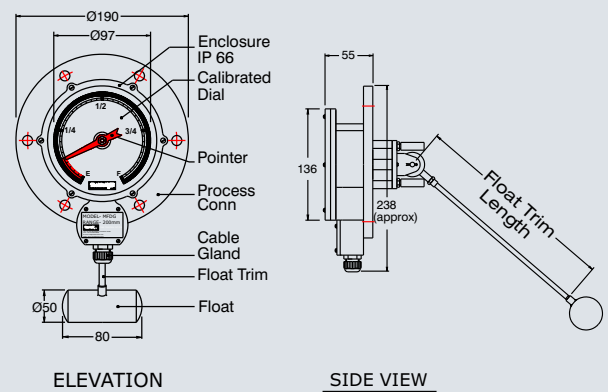

Installation

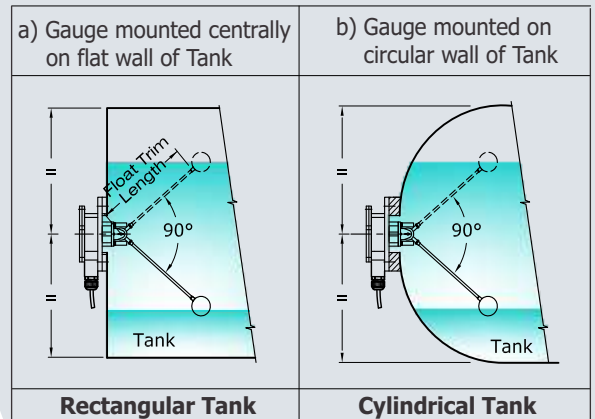

Units in mm

Pune Techtrol Pvt Ltd [CIN : U31909PN1991PTC063403]

Address : S-18, MIDC, Bhosari, Pune - 411026. India

ho@punetechtrol.com +91-20-66342900 www.punetechtrol.com

Works : J-52/7, MIDC, Bhosari, Pune - 411026. India +91-20-67313600

Custom built specs./options available on demand.

We reserve the right to modify design and specifications without prior notice.



R A T E D
NSIC-CRISIL SE1A