



EUREKA

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018, ISO 17025:2017: NABL Certified Company



FLOW NOZZLE ASSEMBLY



**EUREKA
INDUSTRIAL
EQUIPMENTS
PVT. LTD.**

REGD. & SALES OFFICE : 17-20, 1st Floor, Royal Chambers, Paud Road, Pune - 411 038, Maharashtra, India.

■ Tel: 0091-20-25443079,25461315 ■ sales@eurekaflow.com

FACTORY : 501, 'J' Block, M.I.D.C., Pimpri, Pune - 411018.

■ Email: works@eurekaflow.com

MUMBAI OFFICE : Office No.116, Growmore Tower, 1stFloor, Plot No.5, Sector No.2, Kharghar, Navi Mumbai - 410 210 ■ Mobile: 9322598274

www.eurekaflow.com

DESCRIPTION:

Flow nozzle is a DP type flow meter consisting of rounded profile at inlet providing a smooth inlet to the fluid & the particles in the steam there by reducing the wear & tear thus extending the product life. This smooth inlet passage leads to lesser pressure drop & more efficiency.

Eureka's NZL series is typically used for measurement of erosive & high velocity flow, such as high pressure high temperature steam. It can also be used with other fluids such as water, air or other gases.

APPLICATIONS:

- POWER PLANT
- SUGAR INDUSTRY
- PULP & PAPER INDUSTRY
- GAS PROCESSING & TRANSMISSION

FEATURES:


- Best suitable for measurement of high pressure high temperature high velocity steam measurement.
- Smooth profile & rigid structure makes the assembly extremely stable.
- Absolutely leakage free for weld in type assembly.
- Zero maintenance since no moving parts.
- Repeatability: 0.3%
- Less straight lengths requirement.

NOMINAL SIZES AVAILABLE:


- Diameters 50mm to 630mm, as specified by standards for respective type
(For larger sizes please consult Eureka representative.)

MODELS AVAILABLE:


- BASED ON ELEMENT
 - Long Radius High Beta
 - Long Radius Low beta
 - ISA 1932

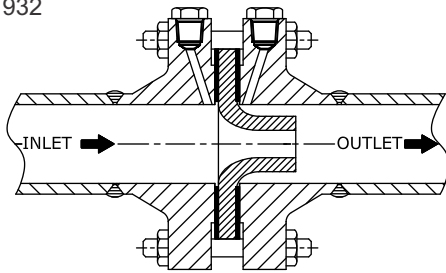


Flow Nozzle Mounted Between Flanges

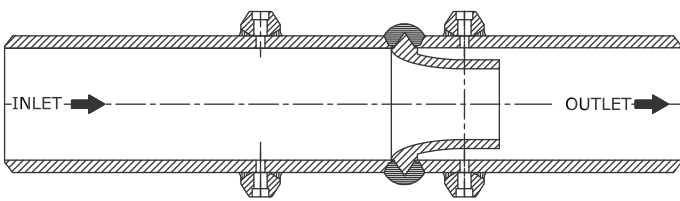

Long Radius High Beta, Weldin Type

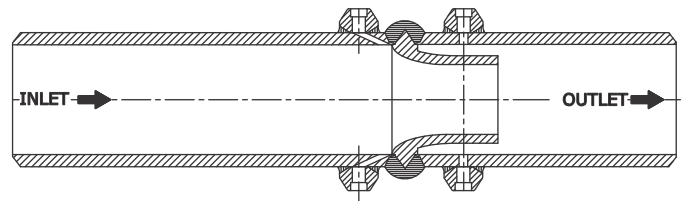

ISA 1932, WELDIN TYPE

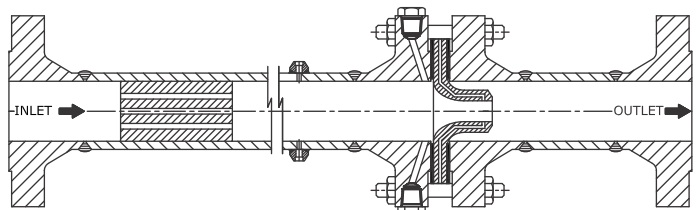

Flanged Mounted With Throat Tap As Per PTC-6

● BASED ON MOUNTING

- Weldin type
- Flanged type
- Flanged type with throat tap nozzle (as per PTC-6 standard)

DESIGN & MANUFACTURING STANDARD:

- ISO-5167 part III
- ASME PTC-19.5
- ASME PTC-6 (The results are used as the basis of Turbine acceptance)
- ASME MFC

DIAMETER RATIO:

- 0.25 to 0.8 - for Long Radius High Beta
- 0.20 to 0.5 - for Long Radius Low Beta
- 0.3 to 0.8 - for ISA 1932

PRESSURE TAPPING:

- Radius taps (D-D/2 tapping) – For Long Radius high beta
- Throat taps – For Long Radius Low beta
- Corner taps – For ISA 1932

UNCERTAINTY:

- Long Radius High Beta - 2%
- Long Radius Low Beta - 0.25%*
- ISA 1932 - 0.8% to 1.2%

*when used with PTC-6 standard

MATERIALS:

Selection based on temperature & process conditions.

Available materials are:

- Element : SA.182 F316
- Pipe: SA.106Gr. B / SA335 P11 / SA335 P22 / SA.335P91
- Flange material: SA105 / SA182F11 / SA182F22 / SA182 F91

* Other materials available on request

ORDERING INFORMATION:

SERIES	MOC OF ELEMENT	LINE SIZE	FLANGE RATING / TYPE	MOC OF PIPE / FLANGE	NOZZLE TYPE
NOZZLE	SA 105 - CS	50	NA - WELDIN TYPE	A106 GR. B / SA105 - CS	Long Radius High Beta → LRH ISA 1932 → ISA Long Radius Low Beta → LRL
	F11 - AS1	80	300# - WN - RF/RTJ	SA335P11 / SA182F11 - AS1	
	F22 - AS2	100	600# - WN - RF/RTJ	SA335P22 / SA182F22 - AS2	
	F91 - AS9	.	900# - WN - RF/RTJ	SA335P91 / SA182F91 - AS9	
	SA182 F316 - S6	.	1500# - WN - RF/RTJ	SA312 TP316 / SA182F316 - S6	
	SA182 F304 - S4	.	2500# - WN - RF/RTJ	SA312 TP304 / SA182F304 - S4	
		600			

** - Please specify wall thickness for non standard schedule.

Note 1: Default pipe schedule will be Sch. STD

Note 2: Required testing to be mentioned separately.